


AGROTRON

336HP

9340 TTV

60 KM/H VARIABLE
+ FRONT LINKAGE & PTO

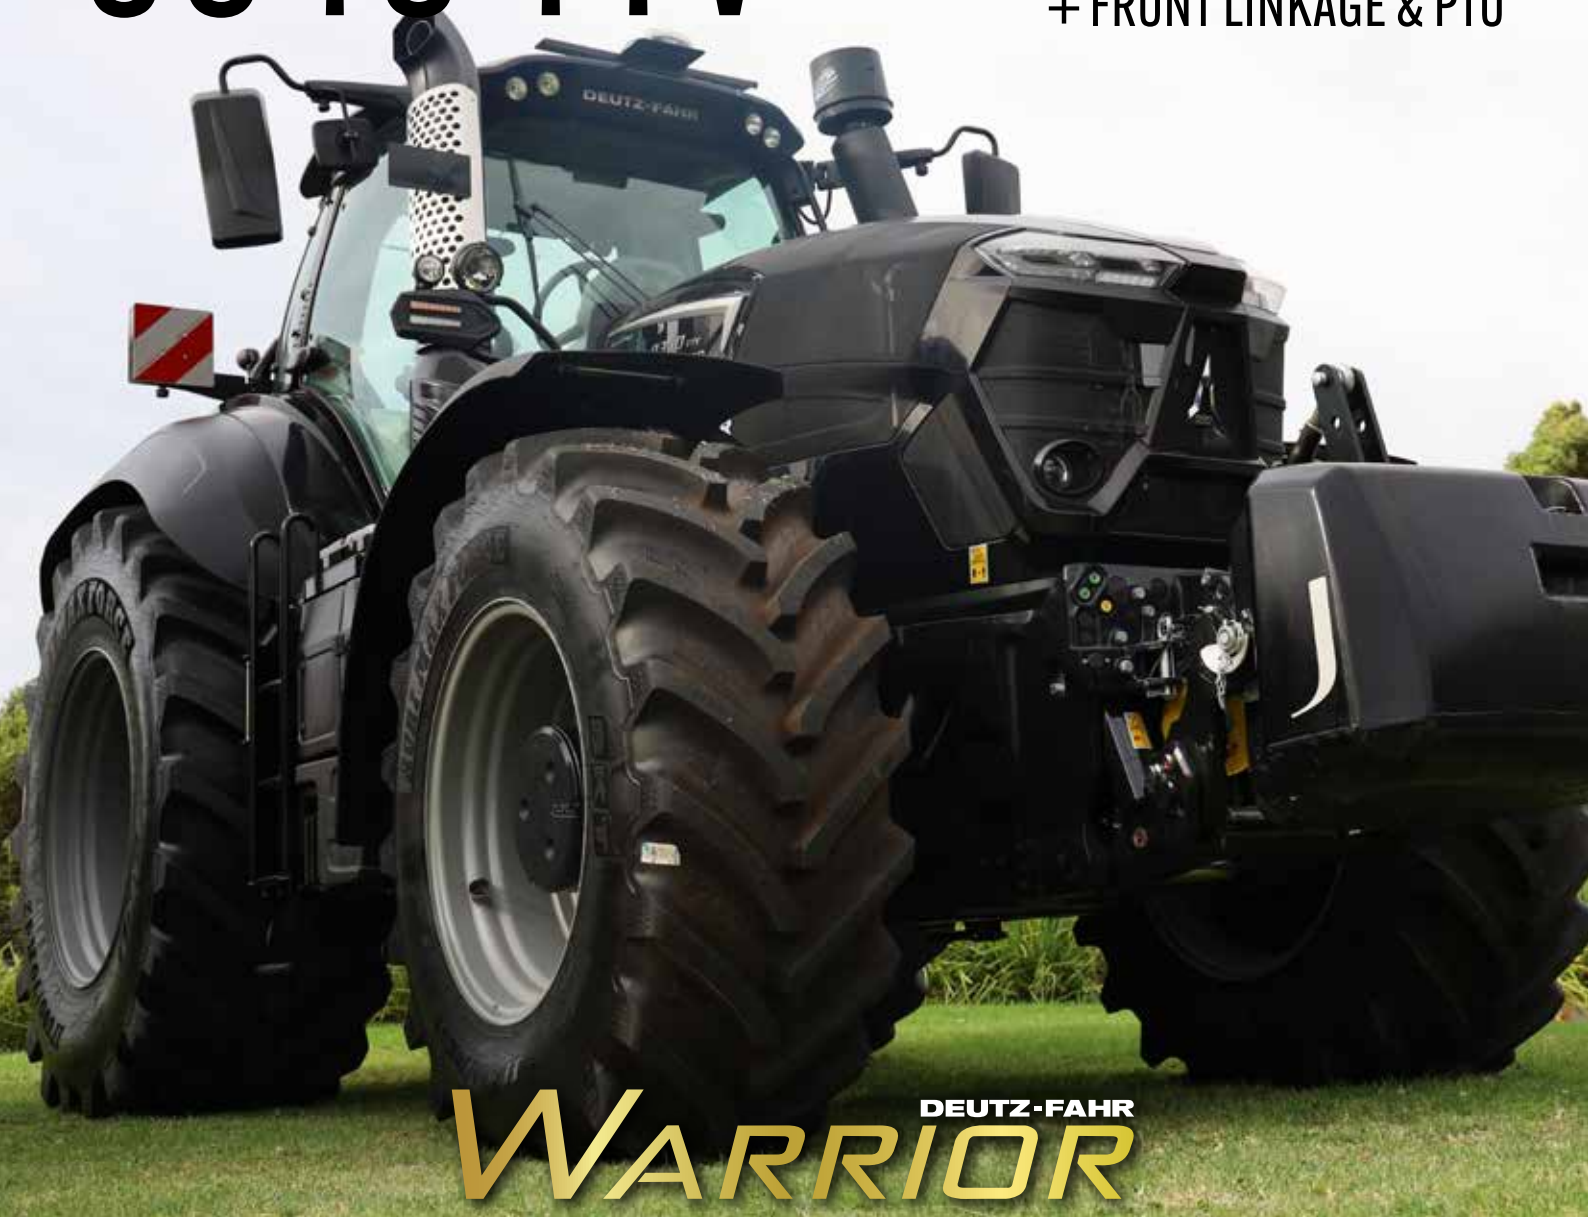

DEUTZ-FAHR WARRIOR

TOP GERMAN TECHNOLOGY

With the 9 Series Warrior, DEUTZ-FAHR engineers have developed an ultra-modern, highly intelligent, high-horsepower tractor, which performs and increases operating efficiency.

This is largely thanks to unique operating comfort, automated routine functions and the most innovative technologies – and all this while consuming minimal resources. Each individual component of the 9 Series Warrior is superbly designed and engineered, among the best in the market.

The top of the range 9 Series offers three perfectly balanced and highly attractive high-horsepower models, giving farmers and contractors the very best opportunity to achieve outstanding results

ENGINE

- Deutz TTCD 7.8 LO6 Tier 3 Diesel Engine
- 6 Cyl/7775cc Twin Turbocharged/Intercooled
- NO AdBlue
- Electronically Controlled
- 4 Valves Per Cylinder
- Liquid/Oil Cooled
- Common Rail DCR Injection System
- Electronically Controlled E-Visco Fan
- 336 hp Max Power (ECE R-120)
- 20Hp Power Boost
- Torque 1372nm
- Engine Speed Programming × 2
- Powercore Air filter with Dust Ejectors
- Side Exhaust
- 600 Lt Fuel Capacity

TRANSMISSION

- ZF Terramatic CVT Transmission
- 4 Working Ranges
- 3 Driving Modes (Auto, PTO, Manual)
- Acceleration and Power Adjustment
- Speed Cruise Control × 2
- Active Stationary Control
- Wet Clutch Powershuttle
- Shuttle Modulation – 5 Stage (Sense Clutch)
- Front Wheel Assist
- 4 Wheel Braking with Power Brake System
- Front Dry Disc Brakes
- Front Axle Suspension
- Hydraulic Trailer Braking
- Front & Rear Diff Lock
- ASM Auto Diff Lock and 4WD Engagement
- Radar
- Separate Transmission Fluid Reservoir
- 60 km/h Road Speed @ Economy RPM

PTO

- Independent Wet Multidisc Clutch
- 3 Speed PTO 540E/1000/1000E
- Push Button Control on Armrest
- Auto PTO
- External PTO Start/Stop
- 1³/₄ 20 Spline PTO Shaft
- Interchangeable PTO Spline Function

WHEEL EQUIPMENT & MISCELLANEOUS

- Fixed Radial Wheel Equipment
- 600/70R34 Front -800/70R42Rear
- IF – Hi Flex Tyre Equipment
- Rear 820kg Wheel Weights
- Dynamic Front Fenders
- Warrior Brilliant Black Paint + Decals
- Stainless Steel Exhaust

FRONT LINKAGE & PTO

- Front Linkage - 5000kg Capacity
- Front PTO – 1000N
- 1 Front Remote & External Raise/Lower
- Dial Control to operate front linkage
- FP-PAC quick attach front weight (1400kg)

OPERATOR ENVIRONMENT

- MaxiVision 2 Air Conditioned Cab
- Automatic Climate Control
- Pneumatic Cabin Suspension
- Cab Roof Hatch Without Glass
- Double Glazed Rear Lower Cab Glass
- Max Comfort Dynamic XXL Deluxe Air Seat with Swivel
- INFOCENTER Pro Digital Display
- WORK Monitor
- MaxCom Armrest Controls - Adjustable
- COMFORTIP Sequential Drive System
- Padded Trainee Seat with Seatbelt
- EASY STEER Quick Steer System
- Bluetooth MP3 Audio System
- WOLP (Work Operating Light Panel)
- 2 External Electric Heated Mirrors
- Courtesy LED Entry Light
- Hi Beam / Low Beam Bonnet + Cab Post Lights
- 2 Bonnet Front Work Lights
- 8 Cabin Work Lights
- 2 Front Work Lights on Cab Post
- 2 Rear Work Lights on Cab Post
- Rotating Beacon

CONNECTED FARMING SYSTEMS

- EASY STEER Hydraulic Auto Steer
- Trimble GFX750 with NAV 900
- RangePoint + UT Ready
- ISOBUS 11783 9 pin socket + Internal cab socket
- ISO 11786 7pin socket

HYD/LINKAGE/DRAWBAR

- Closed Centre Hydraulic System
- 210 L/min Hyd Pump
- Power Beyond Valve and load sensing lines
- Hi Flow & Free Flow return
- Separate 42L/min Steering Pump
- Separate Hydraulic Fluid Reservoir
- 4 Sets of Electro-Hyd Remotes
- Flow and Timer Control on All Remotes
- AGROTRONIC EHR with Position & Draft
- Implement Ride Control
- External Raise & lower on Rear Fenders
- Cat III Hook Ends
- 12000 kg lift Capacity
- Swinging Drawbar - CAT 4

WEIGHTS & DIMENSIONS

Wheelbase: **3153mm**

Length: **268mm**

Total Height: **3500mm**

Total Weight: **14820kg**