

# MAX 75 le

le = linear extension  
rc = radio controlled

## ... manages dense vegetation even on steep terrain

This radio-controlled tracked vehicle is built to take on the toughest challenges with an impressive output of 75 hp. Powered by a high-performance 4-cylinder turbo diesel engine, this vehicle guarantees maximum efficiency. Thanks to the optimal center of gravity, the vehicle's stability is always guaranteed, even on difficult terrain. With a track width of up to 245 cm, slopes of up to 55° can be negotiated with ease. Due to its generous hydraulic performance, the vehicle is ideally equipped to deliver the necessary torque even in the most demanding situations. In terms of mobility and performance, the MAX 75 le is the perfect vehicle for both agriculture and forestry.

### MAX 75 le Tracked Tool Carrier

- > Lifting linkage with assisted **FLOAT**
- > Underbody protection and steel covering
- > Hydraulic adjustment of the vehicle width 800 mm (2x400 mm) [32 inch = 2x16 inch]
- > Active **AUTO TRACK TENSION** system
- > Stability and traction due to superior track profile with high ground contact and LGP undercarriage **HIGH GRIP**
- > Automatic reversible fan
- > Remote control with display 2.4 Ghz - 160 m range
- > 4 Cylinder T4F/STAGE V Perkins engine 2200 cc
- > Closed circuit triple piston pump with variable displacement, plus additional gear pump

#### Options:

- Bio Oil instead of standard oil
- Steeltracks instead of rubber
- Forestry rear protection

### H5 rc 175 Flail Mulcher

- > Mulches grass+brush up to 5 cm [2"]Ø
- > Variable displacement motor 22-45 cm³ with relief valve
- > Helical rotor with SMW flails

### MICROFORST rc 155 Forestry Mulcher

- > Mulches wood up to 15 cm [6"] Ø
- > 30 cc PISTON MOTOR with flushing valve
- > Helical rotor with CUT CONTROL and fixed hammers MINI DUO alternative MINI BLADE

### MICROSOIL rc 105 Stone crusher

- > Crushes stones up to 15 cm [6"] Ø tills the soil as deep as 10 cm [4"]
- > Automatic variable displacement motor 60-80 cm³ M-BOOST
- > Helical rotor with fixed CARBIDE hammers



[YouTube www.youtube.com/seppimulcher](https://www.youtube.com/seppimulcher)

Specifications	MAX 75 le	H5 rc	MICROFORST rc	MICROSOIL rc
Rotor working width	-	175 cm [69 inch]	155 cm [61 inch]	105 cm [41 inch]
Overall width	165-245 cm [65-96 inch]	187 cm [74 inch]	174 cm [69 inch]	126 cm [50 inch]
Depth	260 cm [102 inch]	82 cm [32 inch]	86 cm [34 inch]	93 cm [37 inch]
Height	125 cm [49 inch]	80 cm [31 inch]	76 cm [30 inch]	75 cm [30 inch]
Weight	2.200 kg [4,850 lbs]	520 kg [1,150 lbs]	490 kg [1,080 lbs]	520 kg [1,150 lbs]
Helical rotor	-	18 flails	33 hammers CUT CONTROL	21 CARBIDE hammers

Powerful & High-Performance Hydraulic Drive


MAX 75 le		DIESEL FUEL TANK	HYDRAULIC FLUID TANK	MULCHER HYDRAULICS		TRACKS HYDRAULICS		SECONDARY HYDRAULICS	
HP	kW	l [gallon]	l [gallon]	bar [psi]	l/min [gpm]	bar [psi]	l/min [gpm]	bar [psi]	l/min [gpm]
75	55	39 [10]	72 [19]	380 [5,500]	93 [25]	400 [5,800]	154 [41]	200 [2,900]	15 [4]

EXTENDABLE UNDERCARRIAGE  
to adjust the width of the individual tracks.  
Powerful when climbing and crossing extreme  
slopes. With the enlarged undercarriage, the  
mulcher works more efficiently and precisely  
on extreme and uneven grades.

Hydraulic system  
with self-tensioning tracks





Radio control with graphic display  
controls and monitors all functions  
in a frequency range of 2.4 GHz  
at a range of up to 160m (500")

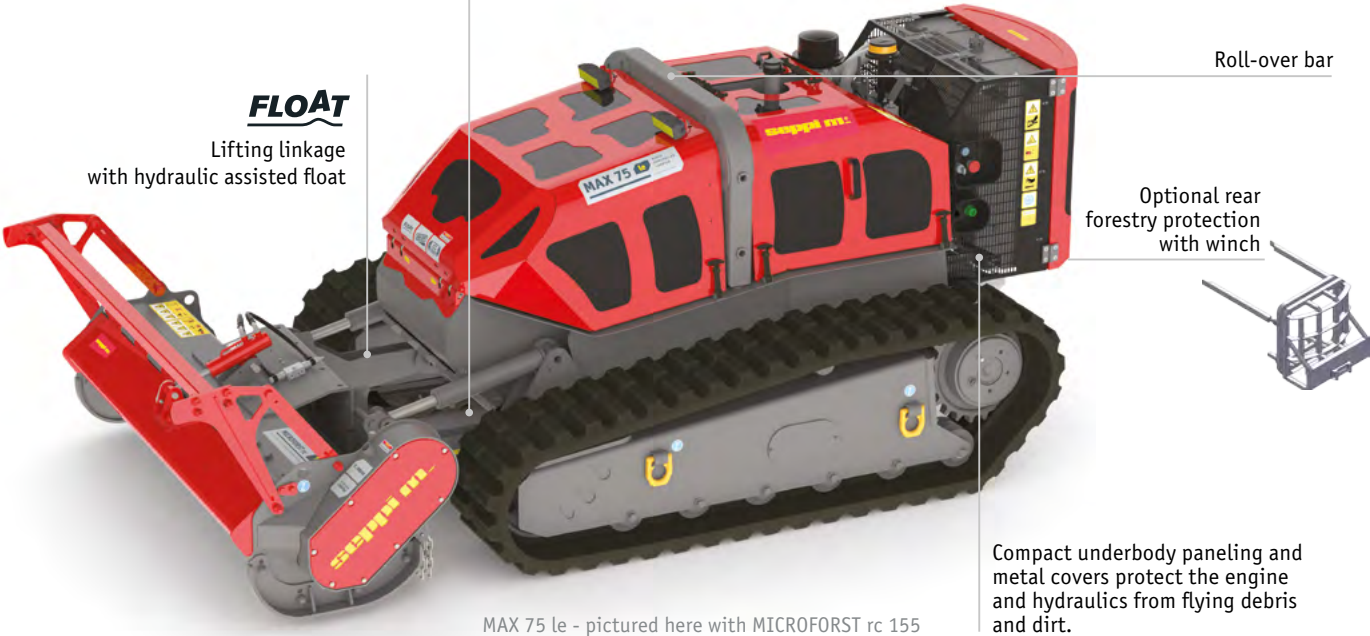

MAX 75 le - pictured here with MICROFORST rc 155

The track width can be extended  
by 40 cm on each side to a total of 245 cm.

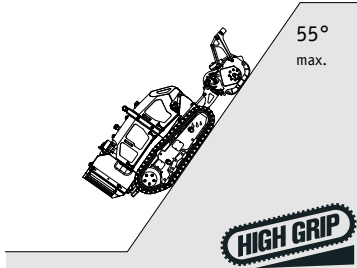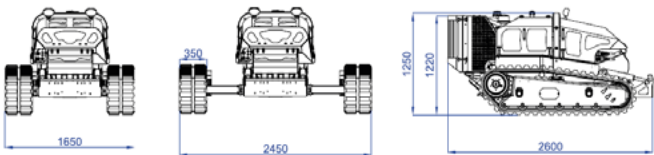

Stability and grip of the vehicle  
on difficult terrain up to 55° slopes,  
under optimal conditions

# MAX 50 le

le = linear extension  
rc = radio controlled

## ... efficient on any terrain

The MAX 50 le is a radio-controlled tool carrier built to last. With 49 hp, it offers maximum reliability thanks to the Perkins T4F/STAGE V industrial 3-cylinder turbo diesel engine. It is optimally positioned with a low center of gravity thanks to the extendable track width. It negotiates steep slopes in complete safety for the operator. The track width can be extended up to 181 cm [71"], enabling the machine to negotiate inclines of up to 55°. Generous hydraulic power provides the torque needed to handle even the most challenging situations.

### MAX 50 le Tracked Tool Carrier

- > Lifting linkage with assisted **FLOAT**
- > Underbody protection and steel covering
- > Hydraulic adjustment of the vehicle width 500 mm (2x250 mm) [20 inch = 2x10 inch]
- > Active **AUTO TRACK TENSION** system
- > Stability and traction due to superior track profile with high ground contact and LGP undercarriage. **HIGH GRIP**
- > Automatic reversible fan
- > Remote control with display 2.4 Ghz - 160 m range
- > 3 Cylinder T4F/STAGE V Perkins engine 1660 cc
- > Closed circuit triple piston pump with variable displacement, plus additional gear pump

#### Options:

- Bio Oil instead of standard oil
- Tracks with spikes
- Forestry rear protection

### H5 rc 155 Flail Mulcher

- > Mulches grass+brush up to 5 cm [2"]Ø
- > Variable displacement motor 22-45 cm³ with relief valve
- > Helical rotor with SMW flails

### MICROFORST rc 125 Forestry Mulcher

- > Mulches wood up to 15 cm [6"] Ø
- > 30 cc PISTON MOTOR with flushing valve
- > Helical rotor with CUT CONTROL and fixed hammers MINI DUO alternative MINI BLADE

### MICROSOIL rc 85 Stone Crusher

- > Crushes stones up to 15 cm [6"] Ø tills the soil as deep as 10 cm [4"]
- > Automatic variable displacement motor 60-80 cm³ M-BOOST
- > Helical rotor with fixed CARBIDE hammers



[YouTube www.youtube.com/seppimulcher](https://www.youtube.com/seppimulcher)

Specifications	MAX 50 le	H5 rc	MICROFORST rc	MICROSOIL rc
Rotor working width	-	155 cm [61 inch]	125 cm [49 inch]	85 cm [33 inch]
Overall width	131-181 cm [52-71 inch]	167 cm [66 inch]	144 cm [57 inch]	106 cm [42 inch]
Depth	215 cm [85 inch]	82 cm [32 inch]	86 cm [34 inch]	93 cm [37 inch]
Height	119 cm [47 inch]	80 cm [31 inch]	76 cm [30 inch]	75 cm [30 inch]
Weight	1.400 kg [3,090 lbs]	440 kg [970 lbs]	410 kg [900 lbs]	470 kg [1,040 lbs]
Helical rotor	-	15 flails	27 hammers CUT CONTROL	18 CARBIDE hammers



Powerful & High-Performance Hydraulic Drive

MAX 50 le		DIESEL FUEL TANK	HYDRAULIC FLUID TANK	MULCHER HYDRAULICS		TRACKS HYDRAULICS		SECONDARY HYDRAULICS	
HP	kW	l [gallon]	l [gallon]	bar [psi]	l/min [gpm]	bar [psi]	l/min [gpm]	bar [psi]	l/min [gpm]
49	36	29 [7.5]	50 [13]	320 [4,640]	80 [21]	320 [4,640]	104 [27]	200 [2,900]	15 [4]

EXTENDABLE UNDERCARRIAGE to adjust the width of the individual tracks. Powerful when climbing and crossing extreme slopes. With the enlarged undercarriage, the mulcher works more efficiently and precisely on extreme and uneven grades.



Radio control with graphic display controls and monitors all functions in a frequency range of 2.4 GHz at a range of up to 160m (500’)

Hydraulic system with self-tensioning tracks




Roll-over bar

FLOAT

Lifting linkage with hydraulic assisted float



Optional rear forestry protection with winch



Compact underbody paneling and metal covers protect the engine and hydraulics from flying debris and dirt.

MAX 50 le - pictured here with MICROFORST rc 125

The track width can be extended by 25 cm on each side to a total of 181 cm.

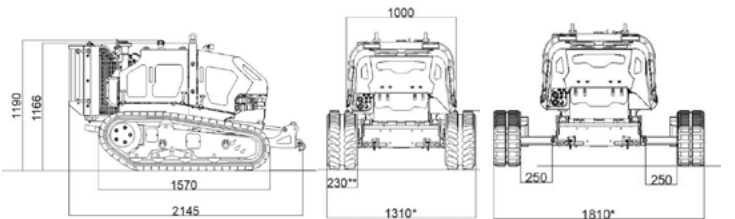

Stability and grip of the vehicle on difficult terrain up to 55° slopes, under optimal conditions