Marshall
MACHINERY

TRUSTED MACHINERY • PROVEN SOLUTIONS • TASMANIA AUSTRALIA

ESTABLISHED 1990




# CAFFINI SPEEDY RANGE

## LOW HP SPRAYERS

# Speedy Range

The Caffini Speedy is a **compact, linkage-mounted** airblast sprayer built with **quality components** for **reliable spraying in smaller blocks.** Its compact design makes it easy to manoeuvre in narrow rows, tight headlands and other areas where turning space is limited.




## SPECIAL VERSIONS

### Speedy "B" 400L

The Caffini Speedy B is designed for spraying **low-growing crops.** Its low-profile 400 L tank stands just 94 cm high, making it easier to work where overhead clearance is limited. It's available in two versions, the Vigneto with a 600 mm fan and the Frutteto with a 700 mm fan.




### Speedy "Mountain" 300-400L







The Caffini Mountain range is available with 600 mm or 700 mm fans. A narrow tank and a three-point linkage set beneath the frame bring the sprayer closer to the tractor. Optional wheel assemblies are available in fixed or hydraulically steered configurations.

# Speedy Vigneto

The **Caffini Speedy Vigneto** is a compact, linkage-mounted airblast sprayer suited to vineyards and trees up to 3 m tall. Built with quality components, it delivers reliable spraying performance and is easy to operate.



Ø 600 mm.

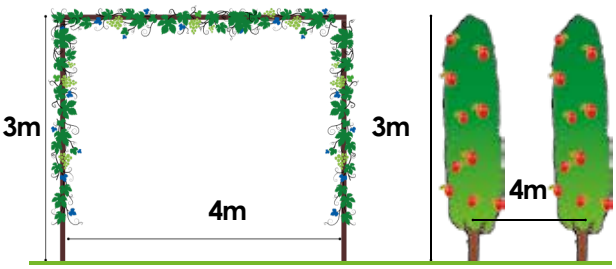






| | | | SERIE | a | b | c | | KG |
|---|---|---|---|---|---|---|---|---|
| 300 | 600 | 45 l/m* | 1 + PM | 100 | 120 | 103 | 10 | 155 |
| 400 | 600 | 45 l/m* | 1 + PM | 100 | 120 | 123 | 10 | 165 |
| 400B | 600 | 45 l/m* | 1 + PM | 124 | 130 | 94 | 10 | 165 |

*Optional: 75l/m




## STANDARD EQUIPMENT



Distributor on the frame



Brass Nozzel holders with anti-drip devices fitted




Direct connection between pump and gearbox for a strong support.

## OPTIONAL EQUIPMENT



Distributor with remote control

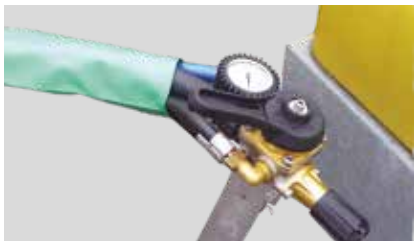

Distributor with remote control in brass.




Double-nozzles in brass with diaphragm anti-drip device


# Speedy Reverse Frutteto

Ø 700 mm.




Air Intake
Air Output

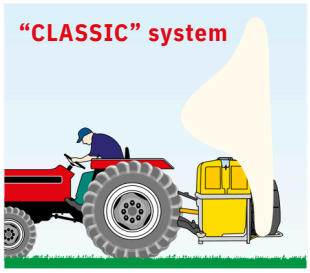


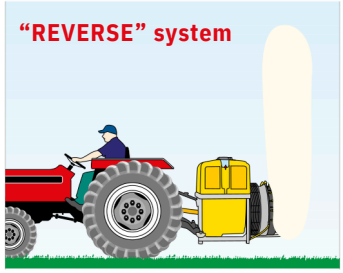




Caffini's Reverse fan system draws air in ahead of the spray nozzles, keeping spray directed away from the tank and tractor. The intake position also helps reduce the amount of leaves, grass clippings and dust drawn up from the ground. Internal deflectors balance airflow to the left and right for more even spray distribution on both sides of the row.

| | | | SERIE | OPT. | a | b | c | | KG |
|---|---|---|---|---|---|---|---|---|---|
| 300 | 700 | 75 l/m* | 1 + PM | 2 + PM | 100 | 120 | 103 | 12 | 170 |
| 400 | 700 | 75 l/m* | 1 + PM | 2 + PM | 100 | 126 | 123 | 12 | 180 |
| 400B | 700 | 75 l/m* | 1 + PM | 2 + PM | 124 | 130 | 94 | 12 | 180 |
| 600 | 700 | 75 l/m* | 1 + PM | 2 + PM | 114 | 127 | 136 | 12 | 220 |
| 800 | 700 | 75 l/m* | 1 + PM | 2 + PM | 169 | 127 | 152 | 12 | 240 |

*Optional: 100l/m

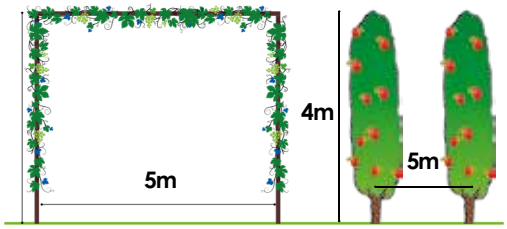


## STANDARD EQUIPMENT



Double-nozzles in brass with diaphragm no-drip device.



Direct connection between pump and ge- arbox for a strong support.

## OPTIONAL EQUIPMENT



Distributor with remote control.



Distributor with remote control in brass.



Compact motorized valves for opening/closing right and left - for tractors with cabins.




Lights for road travel

# Speedy Reverse Frutteto Plus

**Speedy Reverse Frutteto Plus** is the mist blower sprayer with Ø 800 mm fan, for treatment in orchard's and for big trees.




| | | | | a | b | c | | KG |
|---|---|---|---|---|---|---|---|---|
| 400 | 800 | 100 l/m | 2 + PM | 100 | 125 | 143 | 14 | 260 |
| 600 | 800 | 100 l/m | 2 + PM | 114 | 136 | 144 | 14 | 310 |
| 800 | 800 | 100 l/m | 2 + PM | 169 | 152 | 144 | 14 | 335 |







Ø 800 mm.

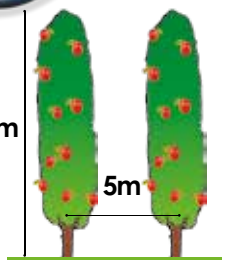


## STANDARD EQUIPMENT

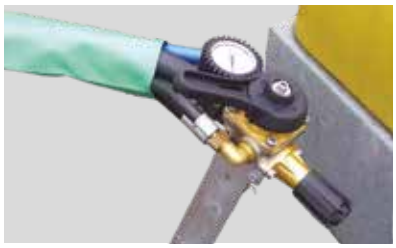

Distributor with remote control in brass.



Double-nozzles in brass with diaphragm no-drip device.

## OPTIONAL EQUIPMENT



Compact motorized valves for opening/closing right and left – for tractors with cabins..





Computer CB9 for the automatic control of the treatment. The display shows l/ha during the treatment, the sprayed litres, the treated area.


# Speedy Reverse Tower

The Caffini Speedy Reverse Tower is designed for spraying crops grown in rows. Its front-facing air intake helps keep grass clippings, pruning debris and dust out of the fan. The tower directs airflow into the canopy, **helping reduce spray drift and improve coverage where it's needed.**




| | | | | a | b | c | | KG |
|---|---|---|---|---|---|---|---|---|
| 400 | 700 | 75 l/m | 2 + PM | 130 | 174 | 158 | 12 | 285 |
| 600 | 700 | 75 l/m | 2 + PM | 130 | 185 | 158 | 12 | 320 |
| 800 | 700 | 75 l/m | 2 + PM | 130 | 190 | 158 | 12 | 350 |



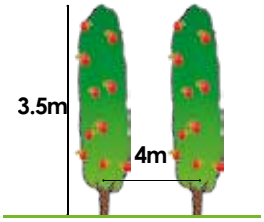
## STANDARD EQUIPMENT





Distributor with remote control in brass.

## OPTIONAL EQUIPMENT



Compact motorized valves for opening/closing right and left – for tractors with cabins.




**Computer CB9** for the automatic control of the treatment. The display shows l/ha during the treatment, the sprayed litres, the treated area.

# PARTS AND AFTER SALES SUPPORT

Marshall Machinery have been supporting Caffini sprayers here in Tasmania for over a decade. We have a deep understanding of how these machines work. You can be assured that when you purchase a Caffini sprayer from Marshall Machinery we will support it.

The majority of wearing components are manufactured by Arag, with a large range of items common to many sprayers.



# Marshall MACHINERY

TRUSTED MACHINERY • PROVEN SOLUTIONS • TASMANIA AUSTRALIA

ESTABLISHED 1990




**Location: 7 Legana Park Drive, Legana, Tas, 7277**
**Office: 03 6330 1808**
**Website: marshallmachinery.com.au**
**Email: sales@marshallmachinery.com.au**

TRUSTED SINCE 1990